



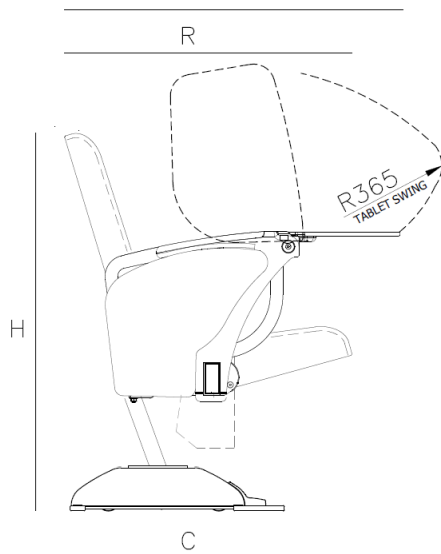

DIMENSIONS	
H	890 (35.0")
C	555 (21.8")
R	680 (26.8")
T	800 (31.5")

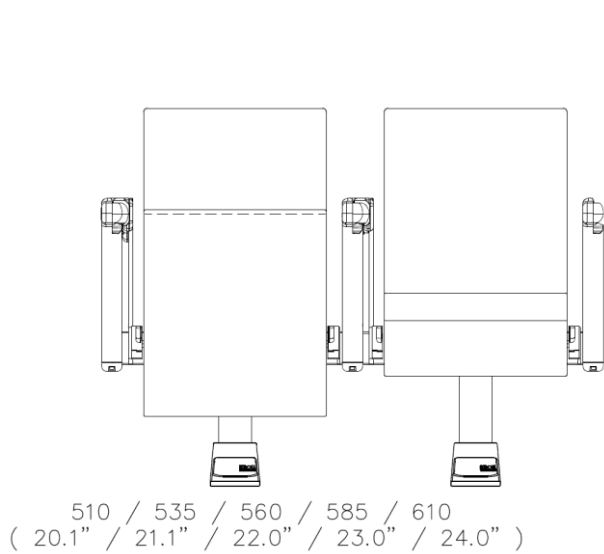

Product Specifications

Backrest

- Fully Upholstered back outer panel.
- The inner structure is made of 19x 19 x 1.6mm Thk. hollow section, upholstered with HR polyurethane foam density 45 kg/m³ and upholstered with fabric covers

Seat

- Fully upholstered seat with padded cover.
- Inner structure made of Ø21mm x Thk. 2mm tubular steel frame, integrated with grid foundation in High Resilience foams.
- Tip-up seat with counterweight systems and being lift-up by means of gravity. Totally silent and maintenance-free.

Leg Structure

- Rectangular hollow section of 76 x 38mm structural steel beam.
- Beam end protected with nylon capping.
- K-Roll Castor System.

Metal Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish of at least 60 microns for indoor use.

Upholstery Material

- Refer to Ferco standard fabric / leatherette / leather charts.

Wrimatic

- Rubber Wrimatic arm.
- Heavy-duty die-cast aluminium alloy finished in oven baked epoxy powder coating to 60 microns.
- The arm consists of a complex swivel joint in precisely fabricated stainless steel with polish finish.
- Housed within the swivel joint is a maintenance-free bearing for long-term operation cycles.
- Static bearing load > 234 kg.
- Dynamic bearing load > 40 kg.
- Swivel plate supporting the writing board made of heavy-duty plate die-cast aluminium alloy in epoxy powder coating.
- The arm shall be clamped to the horizontal beam by means of a heavy-duty plate (die-cast aluminium alloy), with the use of two Allen cap screws.
- Writing board made of 10mm thick injection moulded ABS. Size: 300mm by 425mm.

Fire Safety

- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.

Warranty

- Refer to Ferco product warranty.

Options

- Seat Numbering / Row Lettering
- Plastic Back Outer (for c/c 585mm and 610mm only)
- GPO on Wrimatic Beam
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5