



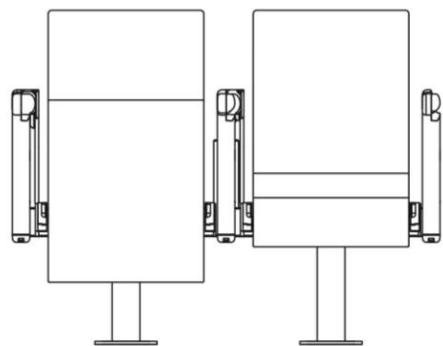

510 (20") 535 (21")
560 (22") 585 (23")
610 (24")

H



C

DIMENSIONS	
H	880 (35")
C	525 (21")



FERCO SEATING ILLUSTRATION ONLY

Product Specifications

Backrest

- Fully Upholstered back outer panel.
- The inner structure is made of 25x12.5x1.6mm thks.
- hollow section & Ø19x1.6mm thks tube, upholstered
- with HR polyurethane foam density 45 kg/m3 and upholstered with fabric covers.

Seat

- Fully upholstered seat with padded cover.
- Inner structure made of Ø21mm x Thk. 2mm tubular steel frame, integrated with grid foundation in High Resilience foams.
- Tip-up seat with counterweight systems and being lift-up by means of gravity. Totally silent and maintenance-free.

Standards

- Rectangular hollow section of 76 x 38mm structural steel beam.
- Beam end protected with nylon capping.
- Fixed floor mounted.

Wrimatic

- Rubber wrimatic arm.
- Heavy-duty die-cast aluminium alloy finished in oven-baked epoxy powder coating to 60 micron.
- The arm consists of a complex swivel joint in precisely fabricated stainless steel with polish finish.
- Housed within the swivel joint is a maintenance-free, bearing for long-term operation cycles.
- Static bearing load > 234 kg.
- Dynamic bearing load > 40 kg.
- Swivel plate supporting the writing board made of heavy-duty plate die-cast aluminium alloy in epoxy powder coating.
- The arm shall be clamped to the horizontal beam by means of a heavy-duty plate (die-cast aluminium alloy), with the use of two allen cap screws.
- Writing board made of 10mm thick injection moulded.
- ABS. Size: 300mm by 425mm.

Metal Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish of at least 60 microns for indoor use.

Upholstery Material

- Refer to Ferco standard fabric/leatherette/leather charts.

Fire Safety

- Flammability compliance with California Bulletin 117 and international regulations. in their last issues and particularly with safety regulations.

Warranty

- Refer to Ferco product warranty.

Options

- Seat numbering
- Row lettering
- Plastic back outer (for only 585 & 610mm)
- Tandem free standing /Tandem removable legs.
- Wooden back outer and seat outer.
- Wrimatic tablet
- Upholstered boxed-up panel
- Data and power provision
- Left end armrest
- GPO(General Power Outlet) On wrimatic beam (adjustable)
- Flammability compliance with BS 5852 : 2006 section 3 ignition source 5.